



TEGERA® 855

Synthetic glove, PU, palm-dipped, 13 gg, nylon, Cat. II, grey, water and oil repellent, for precision work

PROPERTIES

Good fingertip sensitivity, flexible, good fit, comfortable, breathable, light

SPECIFICATION

TYPE OF GLOVE Work gloves - General handling

CATEGORY Cat. II

SIZE RANGE (EU) 5, 6, 7, 8, 9, 10, 11

DIPPING Palm-dipped

DIPPING MATERIAL PU

LINING MATERIAL 13 gg, Nylon

DEXTERITY 5

CUFF STYLE Knitwrist cuff

LENGTH RANGE 220 - 270 mm

COLOUR Grey

PAIRS PER PACKAGE/CARTON 12/120

PIECES PER BOX 0

DISPLAY Bulk pack OUTER MATERIAL SPECIFICATION Polyurethane

INNER MATERIAL SPECIFICATION Nylon

SIZE	ART. NO.	EAN NO.
5	855-5	7340118340944
6	855-6	7392626060647
7	855-7	7392626038097
8	855-8	7392626038158
9	855-9	7392626038219
10	855-10	7392626038318
11	855-11	7392626038417

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

TEGERA® 855

FEATURES

Water and oil repellent palm

PREVENTS RISK OF

Abrasion injuries

PRIMARY ENVIRONMENTS OF USE

Dry environments, moist environments, dirty environments

PRIMARY AREAS OF USE


Assembly, carpentry, inspection work, installation work, machine operating, painting, warehouse work

PRIMARY INDUSTRIES OF USE

Automotive, building and construction

TYPE OF WORK

Light weight

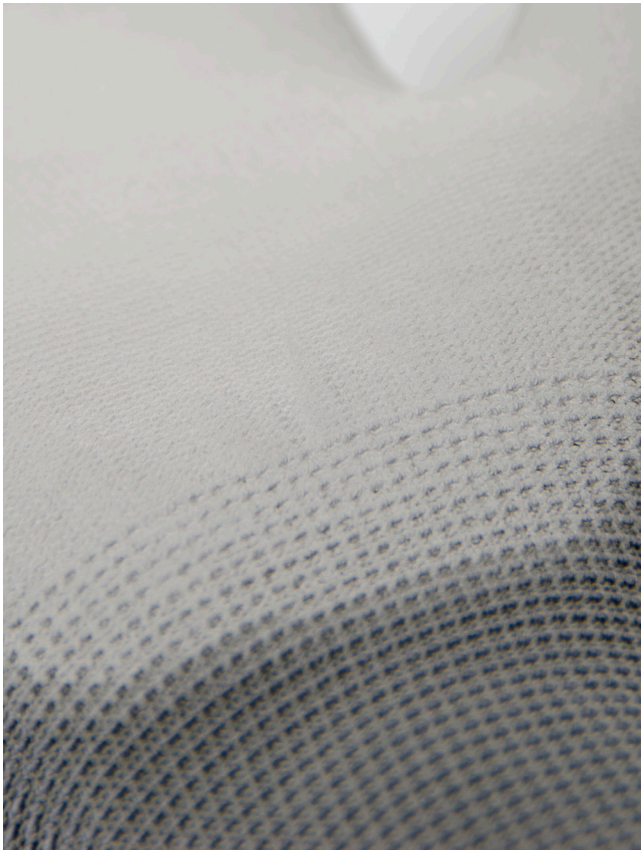

CE Cat. II

EN 420:2003
+ A1:2009



EN 388:2016
4121X



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2021-01-22

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com

TEGERA® 855

EU-TYPE EXAMINATION

0075 CTC, 4 rue Hermann Frenkel, 69367 Lyon Cedex 07
France

COMPLIANCE DESCRIPTION

EN 420:2003 + A1:2009 Protective gloves - general requirements and test methods

EU 2016/425

EN 388:2016 Protective gloves against mechanical risks

Property	Level Achieved	(Maximum Performance)
a) Resistance to abrasion (No. of revolutions)	4	(4)
b) Cut resistance (Index)	1	(5)
c) Tear resistance (N)	2	(4)
d) Puncturing resistance (N)	1	(4)
e) Cut resistance, EN ISO 13997 (N)	X	(F)
f) Impact protection, EN 13594:2015		(P)

EN 388 – Testing

(specifies the requirements that apply for each safety level).

Level of protection/Performance level	1	2	3	4	5
a) Resistance to abrasion (No. of revolutions)	100	500	2 000	8 000	
b) Cut resistance (Index)	1,2	2,5	5,0	10,0	20,0
c) Tear resistance (N)	10	25	50	75	
d) Puncturing resistance (N)	20	60	100	150	

Level of protection/Performance level	A	B	C	D	E	F
e) Cut resistance, EN ISO 13997 (N)	2	5	10	15	22	30

Level of protection/Performance level	P
f) Impact protection, EN 13594:2015	Pass (Level 1 ≤ 9 kN)



CE Cat. II

EN 420:2003
+ A1:2009



EN 388:2016
4121X



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2021-01-22

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com